

# LEVELUK SUPER501 DEEP CLEANING MANUAL



1) Turn off the machine



2) Remove cover



3) Remove the filter



4) Take out CPU



5) Place the CPU in the machine where the filter was.



6) Prepare 1 container



7) Prepare 1 glass citric acid (300gram)



8) Prepare 1 glass hot water



9) Pour 1 glass citric acid onto the container



10) Pour 1 glass hot water onto the container



11) Dissolve the solution



12) Add 1 liter tap water onto the container.



13) Connect white hose with pump hose. (**You must connect from the bottom**)



14) Place pump and acidic hose (grey hose) into the container.



15) Power on the pump

Let pump run 30 minutes to 1 hour

16) Let pump running for 30 minutes to 1 hour



17) Power off the pump.



18) Disconnect white hose from pump hose.



19) Connect white hose to tap water. Then rinse the machine by running water for 5 minutes

\*\*\* For SUPER501 got TWO CHAMBER, we have to run deep cleaning for both chamber  
\*\*\* Repeat step 9 until step 19 for one more hose



21) Remove the CPU




22) Install filter back in



23) Put your cover back in.

Finish

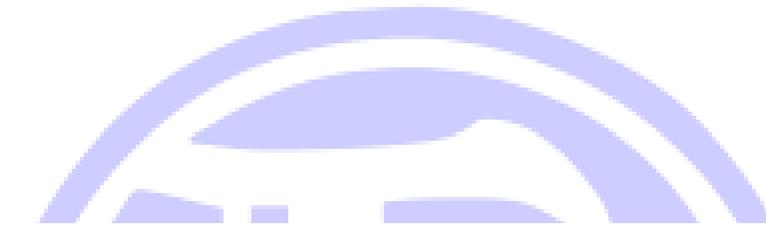

**NOTES:**

Even when you do e-cleanings regularly, you will still need to have a deep cleaning done at least once a year. This will ensure maximum effectiveness and yield the best results for your Kangen Water®.

The optimum pump pressure range between 16 ~ 21liter/minutes.



**ENAGIC (MALAYSIA) SDN BHD**

Company No.201101042983

**Direct Sales License No.: AJL931978**

Unit 25&27-6,6F The Boulevard, Mid Valley City,

Lingkaran Syed Putra, 59200 Kuala Lumpur

Tel: 603-2282 2332 Fax: 603-2282 2335

[www.enagic-my.com](http://www.enagic-my.com)

**Enagic®**